



pE-300^{ultra}

pE-300^{ultra}
pE-300-UT-D-SB-YYY-ZZ
pE-300-UT-D-MB-YYY-ZZ
(SB = 365 nm, MB = 400 nm)

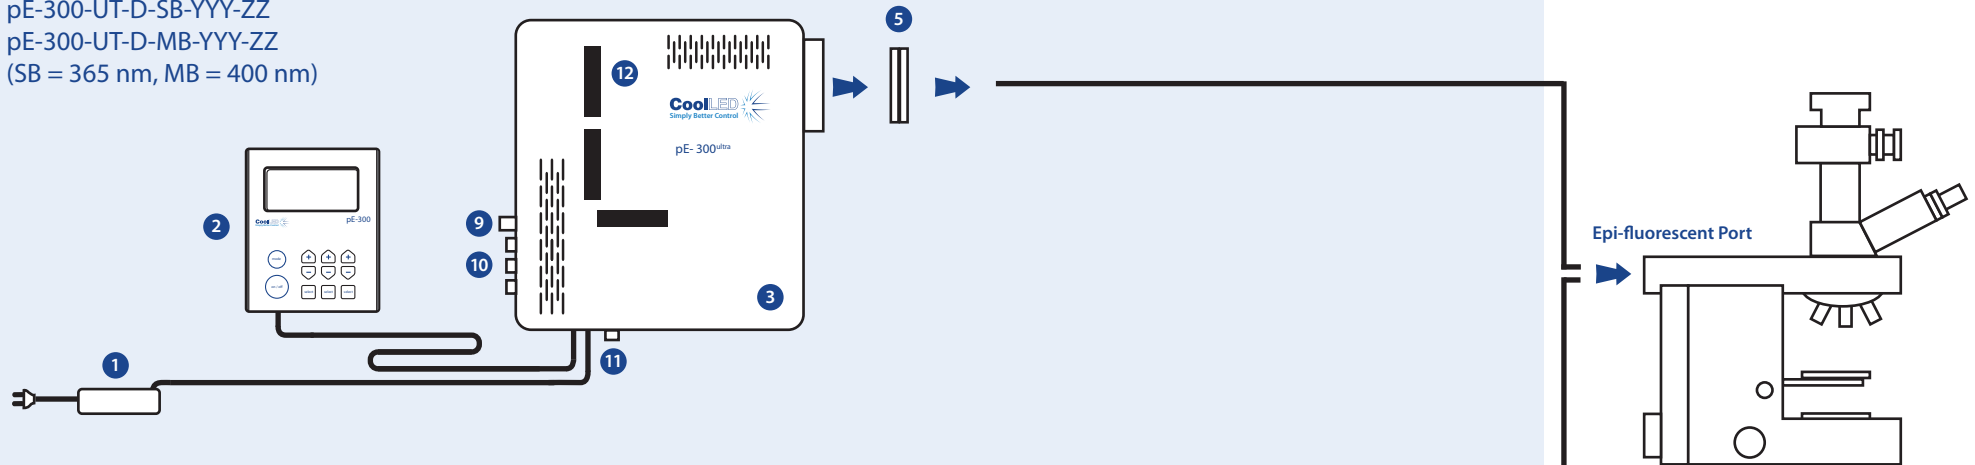

pE-300^{ultra} light guide
pE-300-UT-L-SB-ZZ
pE-300-UT-L-MB-ZZ
(SB = 365 nm, MB = 400 nm)

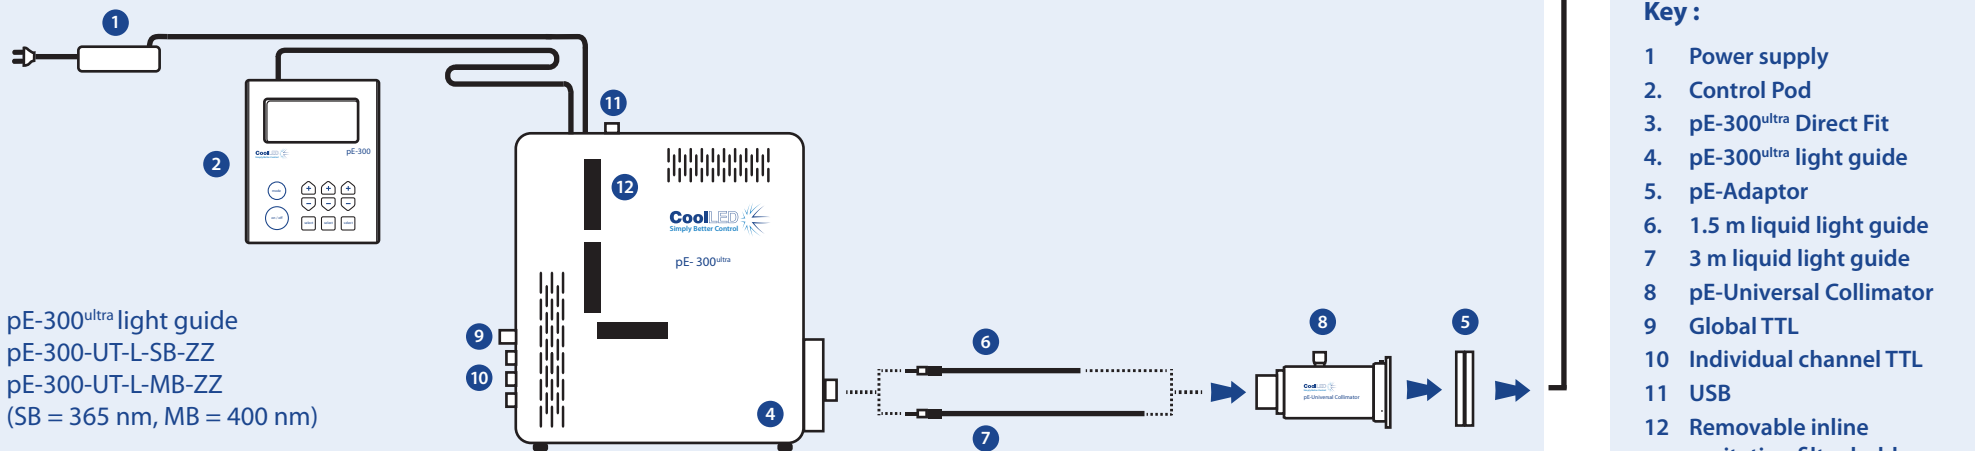

Key :

- 1 Power supply
- 2 Control Pod
- 3 pE-300^{ultra} Direct Fit
- 4 pE-300^{ultra} light guide
- 5 pE-Adaptor
- 6 1.5 m liquid light guide
- 7 3 m liquid light guide
- 8 pE-Universal Collimator
- 9 Global TTL
- 10 Individual channel TTL
- 11 USB
- 12 Removable inline excitation filter holders